

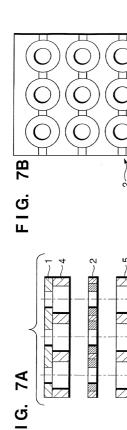




FIG. 5










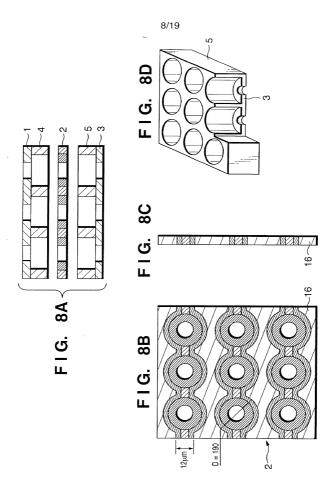






FIG 10

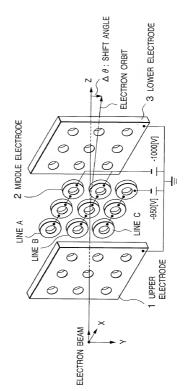


FIG. 11A




FIG. 11B




FIG. 11C




FIG. 11D









FIG. 11E




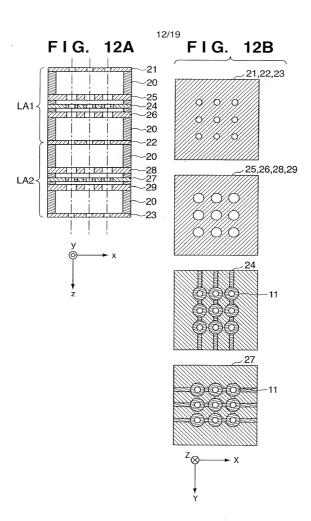


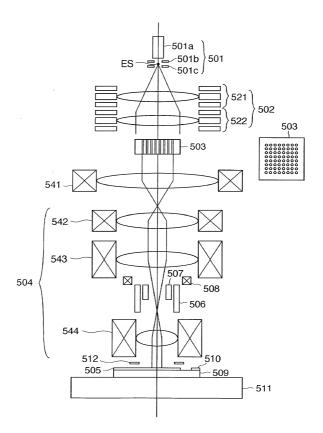







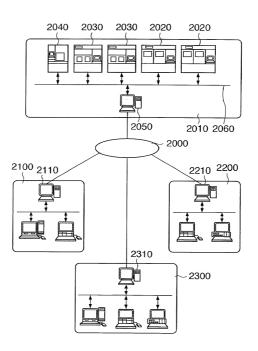

URL http:	//www.maintain.co.jp/db/input.html
TROUBLE	DB INPUT WINDOW
	ICE DATE 20003/15 4040    APPARATUS   ********* 4010    OPERATION ERROR (START-UP ERROR)
SERIAL NU	MBER S/N 465NS4580001 4020
DEGREE O	F URGENCY D 4050
SYMPTOM	LED IS KEPT FLICKERING AFTER POWER-ON 4060
REMEDY	POWER ON AGAIN (PRESS RED BUTTON IN ACTIVATION)
PROGRESS	INTERIM HAS BEEN DONE
SEND RESET 4100 4110 4120	
	ESULT LIST DATABASE SOFTWARE LIBRARY OPERATING GUIDE

FIG. 18




FIG. 19

